


0.10 FOR 4 to 40 POS.
0.12 FOR 42 to 100 POS.

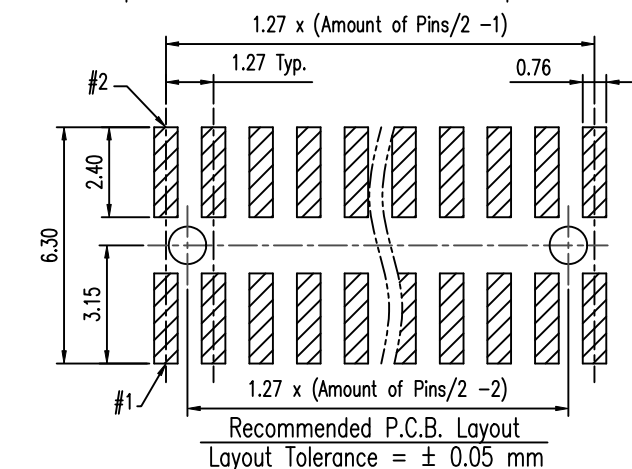

- NOTE:
- MATERIAL,
HOUSING: HIGH TEMP PLASTIC, UL94-V0, BLACK
TERMINAL: COPPER ALLOY, SQ=0.40±0.03MM
 - FINISH:
TERMINAL: GOLD AT CONTACT,
G/F OVER 1um(40u")MIN Ni OVER ALL
 - SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1420
 - THE HSG. WILL WITHSTAND EXPOSURE TO 260C PEAK TEMP. FOR 10 SEC. IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
 - PRODUCT NUMBERING:
20021121 - X 0 0 XX X X LF

LEAD FREE
PLATING:
1: GOLD FLASH ALL OVER
4: 0.25um(10U")GOLD AT CONTACT
8: 0.76um(30U")GOLD AT CONTACT
PACKING
D: TUBE+ CAP
T: TUBE
C: REEL+CAP(6,8,10,12,16,20P)
PIN COUNT
04,06,08, 12, 14,...., 98,A0
(4 - 100 EVERY EVEN PIN)
POST OPTION
0: W/O POST
1: WITH POST

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.X ± 0.38	projection	title	
A	T09-1117	S.LIN	09/15/09		.XX ± 0.25		1.27X1.27MM BTB,HEADER	
B	T10-0013	S.LIN	01/22/10		.XXX ± 0.10		UNSTROUDED, SMT	
C	T11-0022	S.LIN	11'-04-26	angles	0° ±2°	MM	product family	code
				dr	STERLING LIN 09/15/09	← MM →	585	TWN
				engr	STERLING LIN 09/15/09	scale	size	sheet
				chr	GARY HSIEH 09/15/09	NA	A4	1 of 1
				appd	JOSEPH HSIA 09/15/09		20021121	
sheet index	revision sheet	C	1					