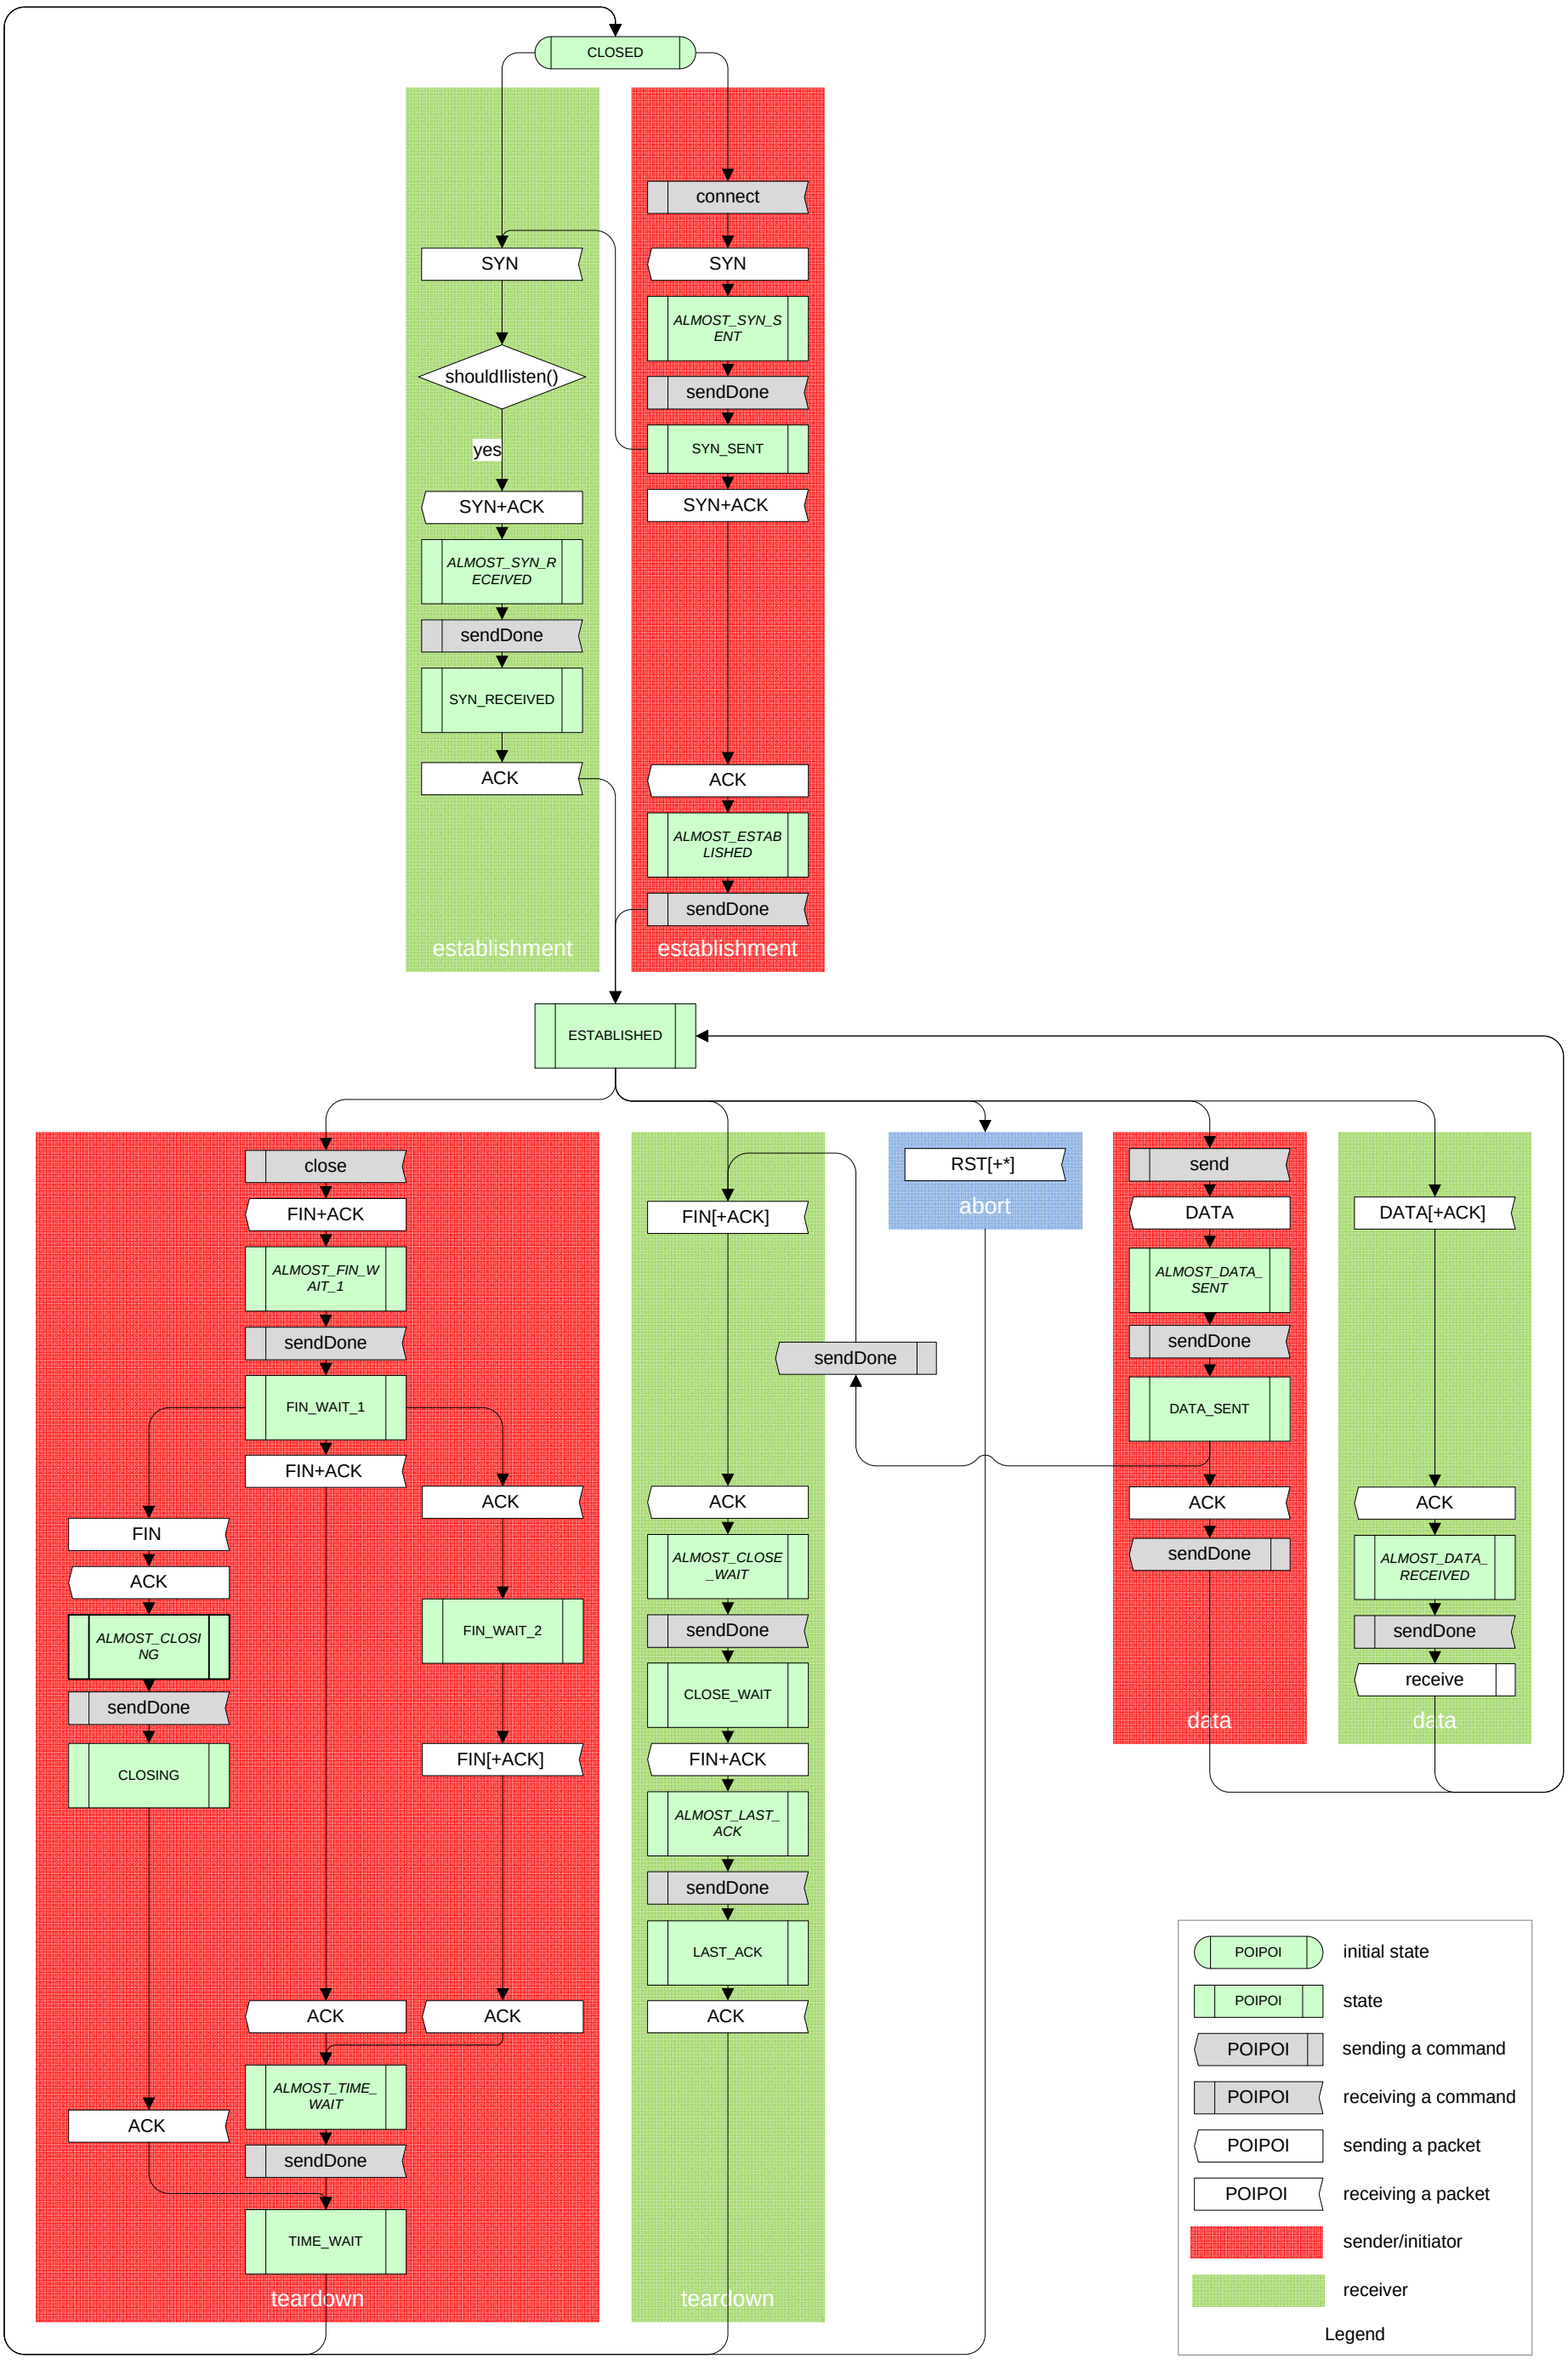
CLOSED
SYN
shouldIlisten()
yes
SYN+ACK
ALMOST_SYN_RECEIVED
sendDone
SYN_RECEIVED
ACK
establishment
connect
SYN
ALMOST_SYN_SENT
sendDone
SYN_SENT
SYN+ACK
ACK
ALMOST_ESTABLISHED
sendDone
establishment
ESTABLISHED
close
FIN+ACK
ALMOST_FIN_WAIT_1
sendDone
FIN_WAIT_1
FIN+ACK
FIN
ACK
ALMOST_CLOSING
sendDone
CLOSING
ACK
FIN_WAIT_2
FIN[+ACK]
ACK
ACK
ALMOST_TIME_WAIT
sendDone
ACK
TIME_WAIT
teardown
FIN[+ACK]
ACK
ALMOST_CLOSE_WAIT
sendDone
CLOSE_WAIT
FIN+ACK
ALMOST_LAST_ACK
sendDone
LAST_ACK
ACK
teardown
sendDone
RST[+*]
abort
send
DATA
ALMOST_DATA_SENT
sendDone
DATA_SENT
ACK
sendDone
data
DATA[+ACK]
ACK
ALMOST_DATA_RECEIVED
sendDone
receive
data
POIPOI
initial state
POIPOI
state
POIPOI
sending a command
POIPOI
receiving a command
POIPOI
sending a packet
POIPOI
receiving a packet
sender/initiator
receiver
Legend